Product Detail

Isometric View

Min. Radius: 9"

Min. Radius: 7 1/4"




Flex-C Arch

Specifications

Flanges and Web:

- ASTM A653, structural grade 33, hot dipped galvanized steel
- Standard protective coating equal or superior to ASTM A653 coating designation G-40 or A-40
- 20 gauge
- Length: 8'

Sectional View

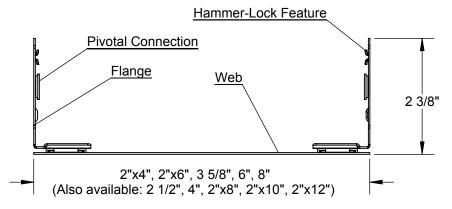

Distributor:	Quantity:
Contractor:	Approved By:
For Product Line PDM	Architect:
Product Detail: PDM34	Date:



5500 W. Reno, Suite 300 Oklahoma City, OK 73127 Tel: 405-996-5343 Fax: 405-996-5353 E-mail: info@flexabilityconcepts.com

Web: www.flexabilityconcepts.com