


# Product Detail

ICC Compliant ICC-ES evaluation ER-6003 at [www.icc-es.org](http://www.icc-es.org)


## Flex-C Plate

### 2x6

Isometric View

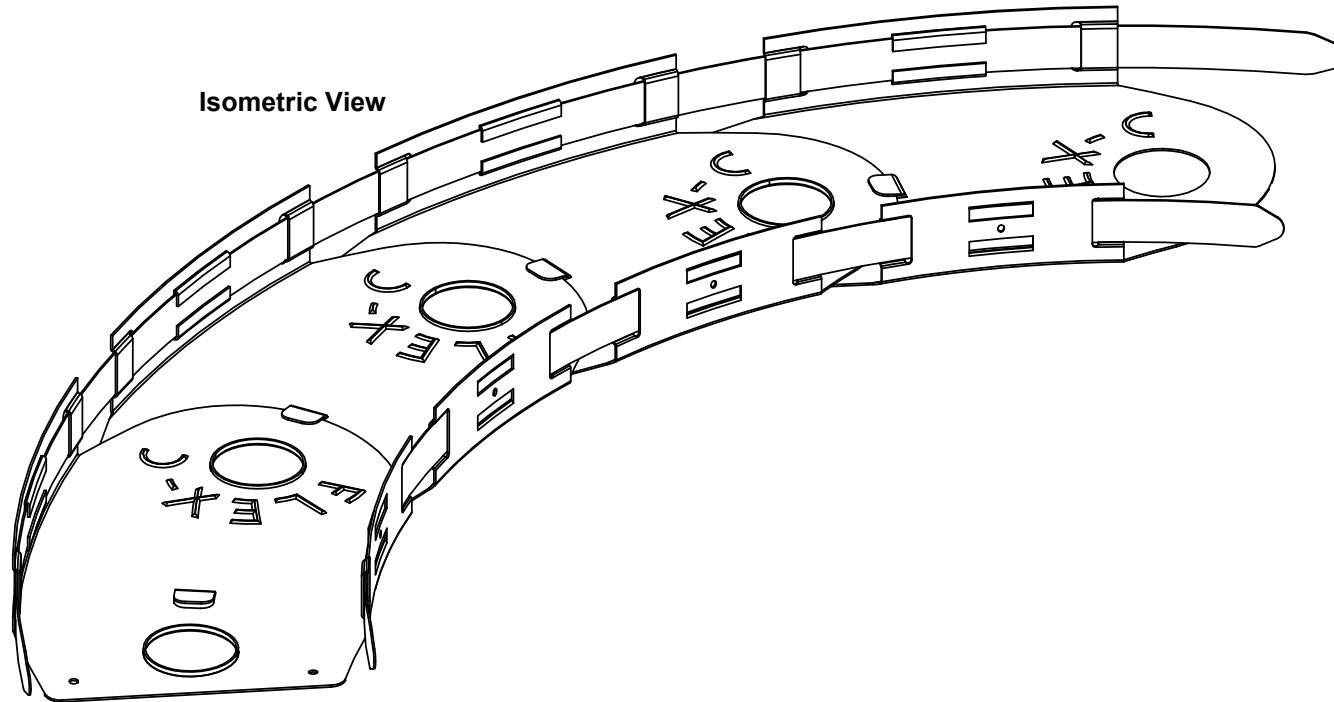

Sectional View

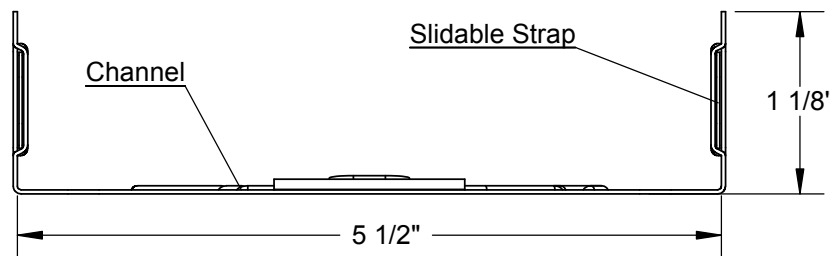

### Specifications

#### Channel:

- ASTM A653, structural grade 33, hot dipped galvanized steel
- Standard protective coating equal or superior to ASTM A653 coating designation G-60 minimum.
- 20 gauge
- Length: 8'

#### Slidable Strap:

- ASTM A653, structural grade 80, galvanized steel
- Standard protective coating equal or superior to ASTM A653 coating designation G-60 minimum.

Dimensions: .750" x .025"

#### Integral Strap:

- The specifications for the strap are the same as the channel with 16 Ga. thickness.

**FLEX-ABILITY  
CONCEPTS**

5500 SW 36th Street  
Oklahoma City, OK 73179  
Tel: 405-996-5343 Fax: 405-996-5353  
E-mail: [info@flexabilityconcepts.com](mailto:info@flexabilityconcepts.com)  
Web: [www.flexabilityconcepts.com](http://www.flexabilityconcepts.com)

Distributor:

Quantity:

Contractor:

Approved By:

Project:

Architect:

Product Detail: PDM14

Date: